

KGSNO16-PP-AS

Linear ball bearing and housing unit

Schaeffler Kimliği:
0042530780000

Linear ball bearing and housing unit; Heavy duty range, With segment cutout, without slot, sealed, greased, with relubrication facility

Teknik bilgiler

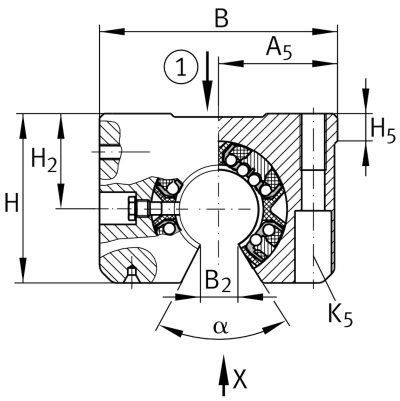

Main Dimensions & Performance Data

F_W	16 mm	Diameter of ball complement
H	35 mm	heigth
L	37 mm	length
B	53 mm	width
C_{max}	1.430 N	load capacity dyn.
$C_{0\,max}$	1.550 N	load capacity stat.
≈m	0,15 kg	Ağırlık

Veri tablosu, seçilen ürünün boyutları ve temel yük kapasitesi hakkında yalnızca genel bir bakış sunar. Lütfen bu ürüne dair ayrıntılı bilgileri ve kılavuzları inceleyin. Daha ayrıntılı bilgi için internet sitemizdeki iletişim formunu kullanabilirsiniz.

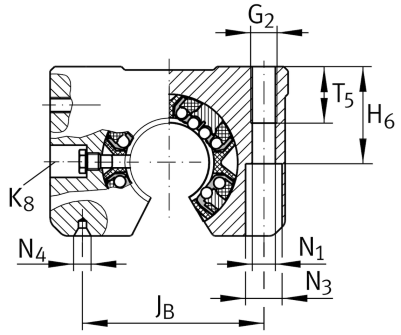



Mounting dimensions

J_B	40 mm	
Tol J_B	+0,15	Upper tolerance
Tol J_B	-0,15	Lower tolerance
B_2	10,1 mm	
A_5	26,5 mm	
Tol A_5	+0,01	Upper tolerance
Tol A_5	-0,01	Lower tolerance
J_L	26 mm	Distance
Tol J_L	+0,15	Upper tolerance
Tol J_L	-0,15	Lower tolerance
H_2	22 mm	Center height
Tol H_2	+0,008	Upper tolerance
Tol H_2	-0,016	Lower tolerance
H_5	7,5 mm	
T_5	13 mm	
H_6	21 mm	
G_2	M6	
N_1	5,3 mm	
N_4	1,6x3,35	
N_3	10 mm	
K_5	M5	
K_8	NIP4MZ	Lubrication nipple
	6	Ball rows
α	68 °	Angle

Veri tablosu, seçilen ürünün boyutları ve temel yük kapasitesi hakkında yalnızca genel bir bakış sunar. Lütfen bu ürüne dair ayrıntılı bilgileri ve kılavuzları inceleyin. Daha ayrıntılı bilgi için internet sitemizdeki iletişim formunu kullanabilirsiniz.