


KWVE15-B-H

Recirculating ball bearing carriage


Carriages KWVE...-B-H, high, narrow carriage, four-row

Teknik bilgiler

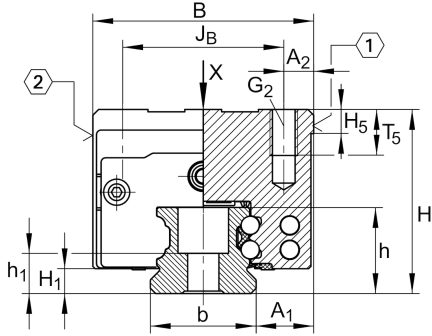

Main Dimensions & Performance Data

H	28 mm	height system
B	34 mm	width carriage
L	61,2 mm	overall length carriage
C	7.200 N	dynamic load rating
C ₀	14.500 N	static load rating
M _{0x}	150 Nm	static moment rating about X axis
M _{0y}	100 Nm	static moment rating about Y axis
M _{0z}	100 Nm	static moment rating about Z axis
≈m	0,2 kg	Ağırlık

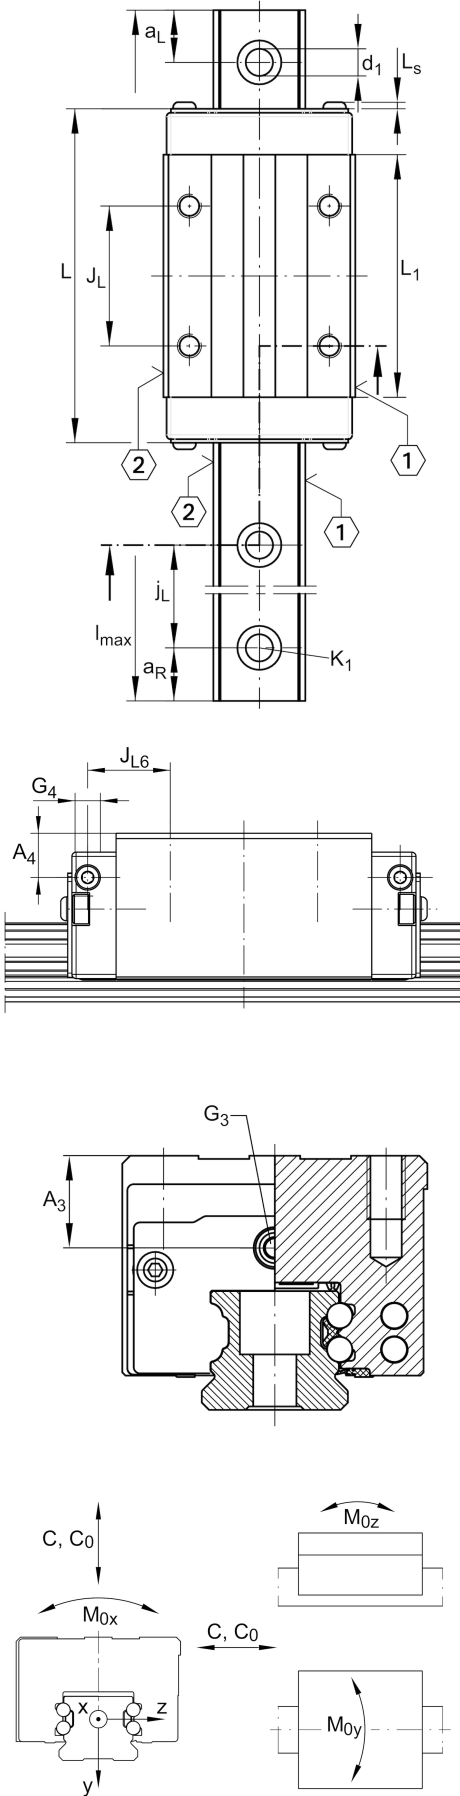

Mounting dimensions

A_1	9,5 mm	Distance from locating edge on carriage to locating edge on guideway
J_B	26 mm	
b	15 mm	width rail
A_2	4 mm	Distance from locating edge to hole
L_1	39,8 mm	
L_S	1,3 mm	
J_L	26 mm	
H_1	4,3 mm	Free space, system dimension
H_5	4,75 mm	
T_5	6 mm	Thread depth
G_2	M4	fixing screws above (DIN ISO 4762-12.9)
$G_2 M_A$	5 Nm	maximum tightening torque
A_3	8,3 mm	position lubrication connector
G_3	M3	lubrication connector
$t G_3$	5,5 mm	maximum permissible screw depth for lubrication connectors
A_4	7,2 mm	position lubrication connector
G_4	M3	lubrication connector
$t G_4$	5,5 mm	maximum permissible screw depth for lubrication connectors
J_{L6}	11,1 mm	position lubrication connector

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------



Ürün ayrıntılarını medias'ta görüntüleyin

30.09.2024, 12:51:32 TRT

SCHAEFFLER

