


KWVE20-B-SL

Recirculating ball bearing carriage


Carriages KWVE...-B-SL, narrow, long carriage, four-row

Teknik bilgiler

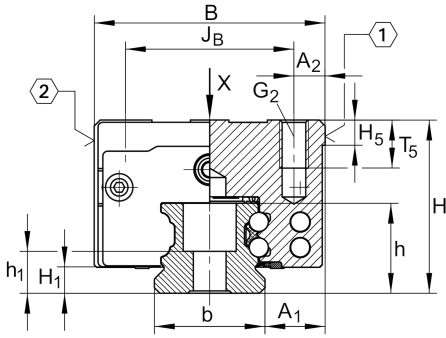

Main Dimensions & Performance Data

H	30 mm	height system
B	44 mm	width carriage
L	88,9 mm	overall length carriage
C	16.200 N	dynamic load rating
C ₀	36.500 N	static load rating
M _{0x}	452 Nm	static moment rating about X axis
M _{0y}	430 Nm	static moment rating about Y axis
M _{0z}	430 Nm	static moment rating about Z axis
≈m	0,46 kg	Ağırlık

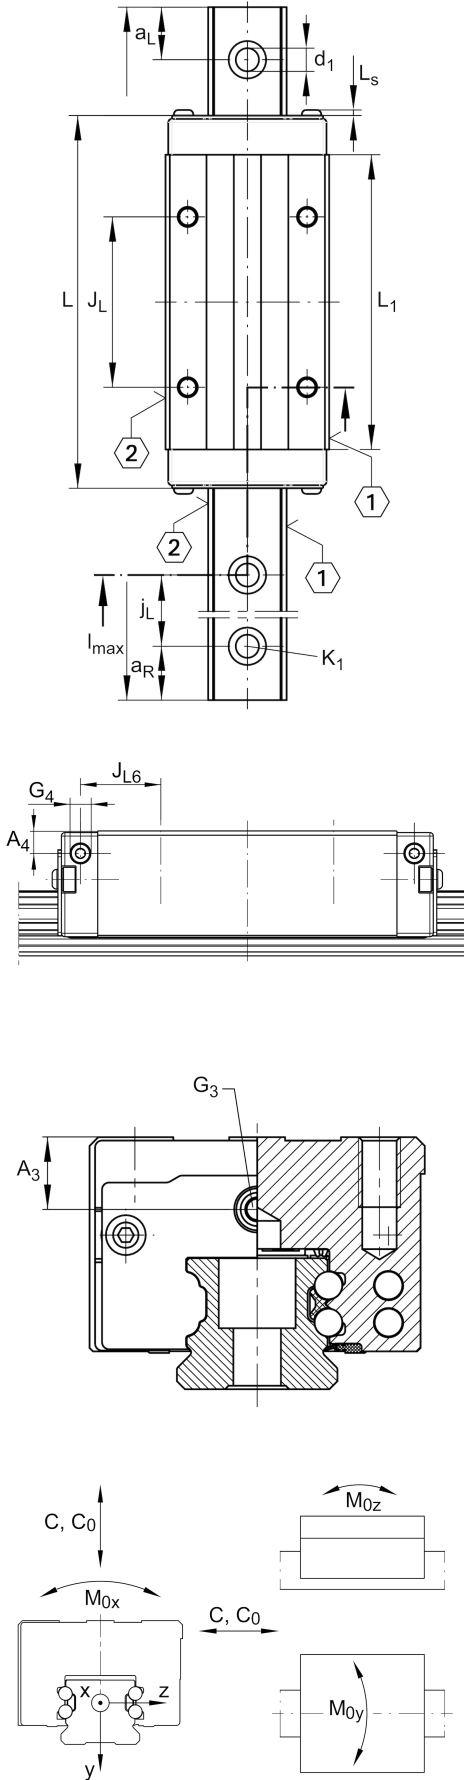

Mounting dimensions

A_1	12 mm	Distance from locating edge on carriage to locating edge on guideway
J_B	32 mm	
b	20 mm	width rail
A_2	6 mm	Distance from locating edge to hole
L_1	67,9 mm	
L_S	1,3 mm	
J_L	50 mm	
H_1	4,5 mm	Free space, system dimension
H_5	5,25 mm	
T_5	7,5 mm	Thread depth
G_2	M5	fixing screws above (DIN ISO 4762-12.9)
$G_2 M_A$	10 Nm	maximum tightening torque
A_3	7,7 mm	position lubrication connector
G_3	M5	lubrication connector
$t G_3$	7 mm	maximum permissible screw depth for lubrication connectors
A_4	4,6 mm	position lubrication connector
G_4	M5	lubrication connector
$t G_4$	5,5 mm	maximum permissible screw depth for lubrication connectors
J_{L6}	13,2 mm	position lubrication connector

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------



Ürün ayrıntılarını medias'ta görüntüleyin

30.09.2024, 12:43:07 TRT

SCHAEFFLER

