


KWVE35-B-SL

Recirculating ball bearing carriage


Carriages KWVE...-B-SL, narrow, long carriage, four-row

Teknik bilgiler

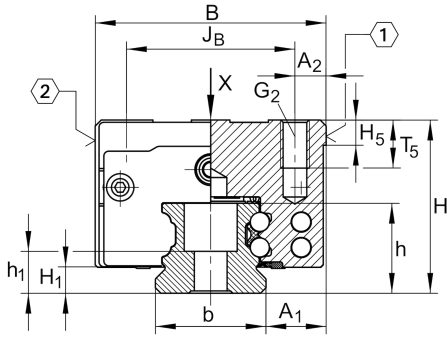

Main Dimensions & Performance Data

H	48 mm	height system
B	70 mm	width carriage
L	145 mm	overall length carriage
C	47.500 N	dynamic load rating
C ₀	100.000 N	static load rating
M _{0x}	2.625 Nm	static moment rating about X axis
M _{0y}	1.890 Nm	static moment rating about Y axis
M _{0z}	1.890 Nm	static moment rating about Z axis
≈m	1,81 kg	Ağırlık

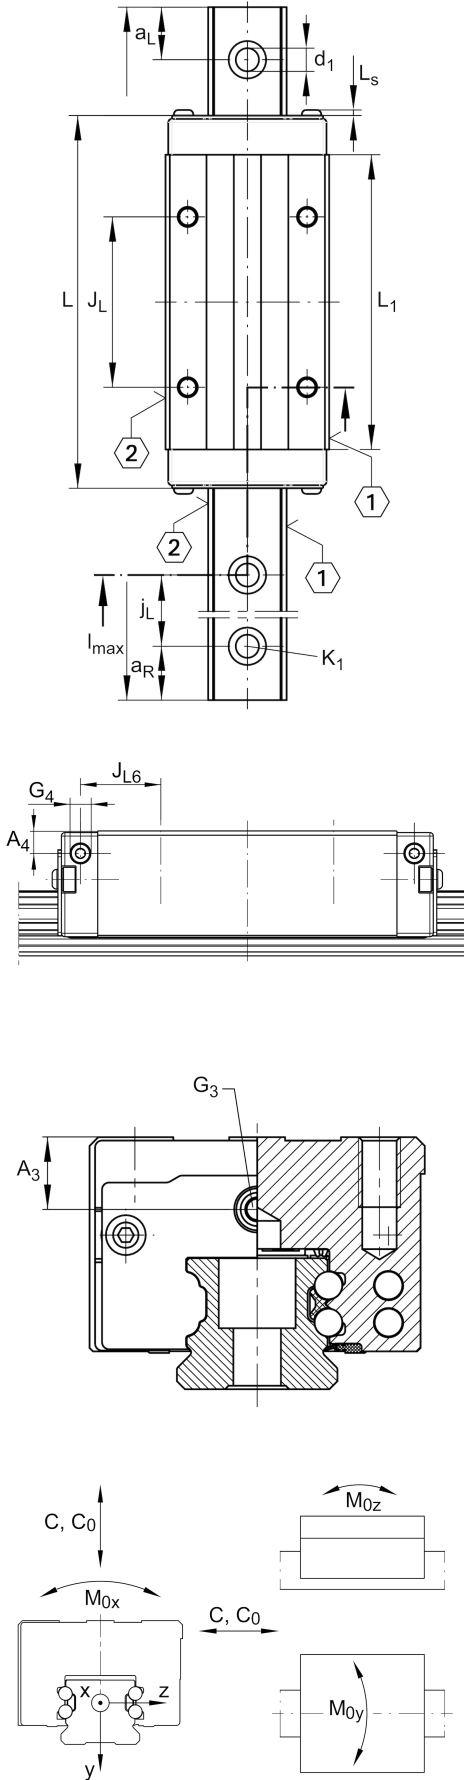

Mounting dimensions

A_1	18 mm	Distance from locating edge on carriage to locating edge on guideway
J_B	50 mm	
b	34 mm	width rail
A_2	10 mm	Distance from locating edge to hole
L_1	113 mm	
L_S	1,65 mm	
J_L	72 mm	
H_1	6,7 mm	Free space, system dimension
H_5	6,75 mm	
T_5	13,5 mm	Thread depth
G_2	M8	fixing screws above (DIN ISO 4762-12.9)
$G_2 M_A$	41 Nm	maximum tightening torque
A_3	12,3 mm	position lubrication connector
G_3	M6	lubrication connector
$t G_3$	7 mm	maximum permissible screw depth for lubrication connectors
A_4	11 mm	position lubrication connector
G_4	M6	lubrication connector
$t G_4$	7 mm	maximum permissible screw depth for lubrication connectors
J_{L6}	27,5 mm	position lubrication connector

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------



Ürün ayrıntılarını medias'ta görüntüleyin

30.09.2024, 12:43:51 TRT

SCHAEFFLER

