

KWVE45-B-HL

Recirculating ball bearing carriage

Carriages KWVE..-B-HL, high, narrow, long carriage, four-row

Teknik bilgiler

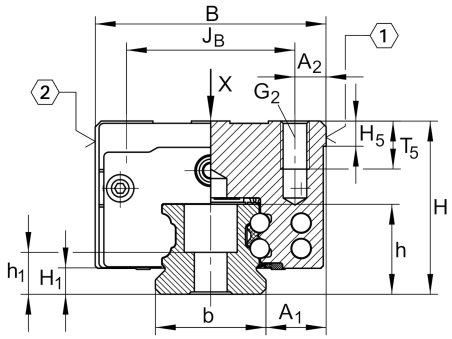

Main Dimensions & Performance Data

H	70 mm	height system
B	86 mm	width carriage
L	172,7 mm	overall length carriage
C	82.000 N	dynamic load rating
C_0	181.000 N	static load rating
M_{0x}	4.635 Nm	static moment rating about X axis
M_{0y}	4.000 Nm	static moment rating about Y axis
M_{0z}	4.000 Nm	static moment rating about Z axis
≈m	4,27 kg	Ağırlık

Veri tablosu, seçilen ürünün boyutları ve temel yük kapasitesi hakkında yalnızca genel bir bakış sunar. Lütfen bu ürüne dair ayrıntılı bilgileri ve kılavuzları inceleyin. Daha ayrıntılı bilgi için internet sitemizdeki iletişim formunu kullanabilirsiniz.

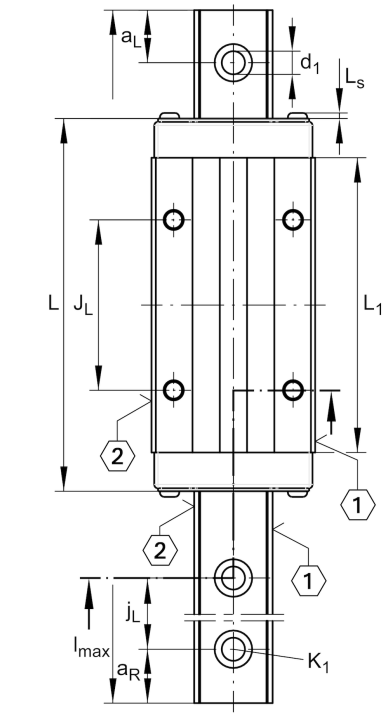

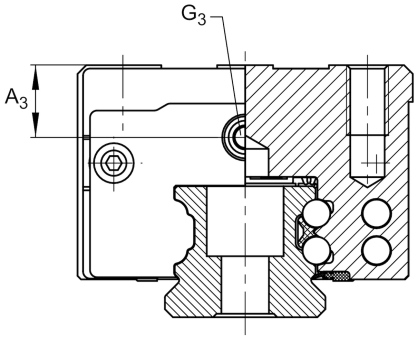

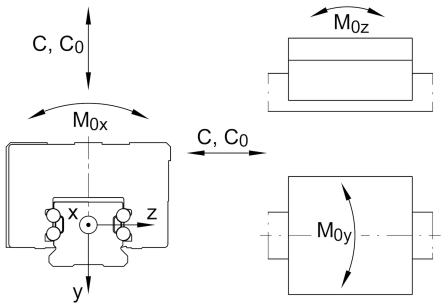

Mounting dimensions

A_1	20,5 mm	Distance from locating edge on carriage to locating edge on guideway
J_B	60 mm	
b	45 mm	width rail
A_2	13 mm	Distance from locating edge to hole
L_1	134,6 mm	
L_S	2,2 mm	
J_L	80 mm	
H_1	9,7 mm	Free space, system dimension
H_5	9,25 mm	
T_5	17 mm	Thread depth
G_2	M10	fixing screws above (DIN ISO 4762-12.9)
G2 M_A	83 Nm	maximum tightening torque
A_3	26,5 mm	position lubrication connector
G_3	M6	lubrication connector
t G_3	7 mm	maximum permissible screw depth for lubrication connectors
A_4	26,5 mm	position lubrication connector
G_4	M6	lubrication connector
t G_4	7 mm	maximum permissible screw depth for lubrication connectors
J_{L6}	35,3 mm	position lubrication connector

Additional information

VMKB_065	KWVE	Material name

Veri tablosu, seçilen ürünün boyutları ve temel yük kapasitesi hakkında yalnızca genel bir bakış sunar. Lütfen bu ürüne dair ayrıntılı bilgileri ve kılavuzları inceleyin. Daha ayrıntılı bilgi için internet sitemizdeki iletişim formunu kullanabilirsiniz.



S05

Veri tablosu, seçilen ürünün boyutları ve temel yük kapasitesi hakkında yalnızca genel bir bakış sunar. Lütfen bu ürüne dair ayrıntılı bilgileri ve kılavuzları inceleyin. Daha ayrıntılı bilgi için internet sitemizdeki iletişim formunu kullanabilirsiniz.