


KWVE45-B-SL

Recirculating ball bearing carriage


Carriages KWVE...-B-SL, narrow, long carriage, four-row

Teknik bilgiler

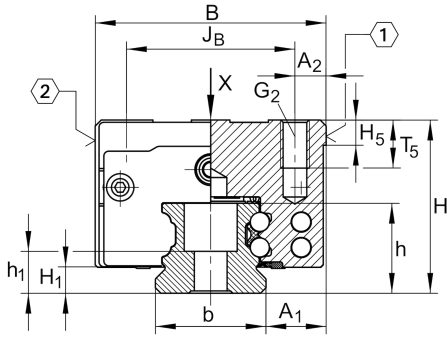

Main Dimensions & Performance Data

H	60 mm	height system
B	86 mm	width carriage
L	172,7 mm	overall length carriage
C	82.000 N	dynamic load rating
C ₀	181.000 N	static load rating
M _{0x}	4.635 Nm	static moment rating about X axis
M _{0y}	4.000 Nm	static moment rating about Y axis
M _{0z}	4.000 Nm	static moment rating about Z axis
≈m	3,38 kg	Ağırlık

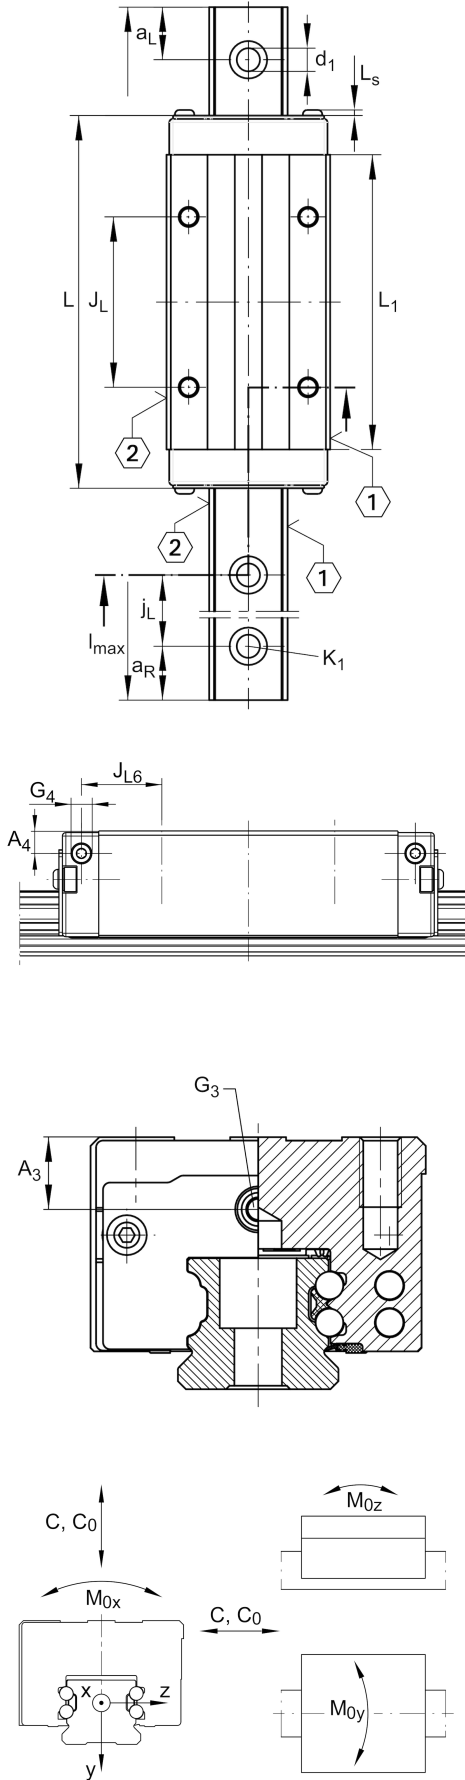

Mounting dimensions

A_1	20,5 mm	Distance from locating edge on carriage to locating edge on guideway
J_B	60 mm	
b	45 mm	width rail
A_2	13 mm	Distance from locating edge to hole
L_1	134,6 mm	
L_S	2,2 mm	
J_L	80 mm	
H_1	9,7 mm	Free space, system dimension
H_5	9,25 mm	
T_5	17 mm	Thread depth
G_2	M10	fixing screws above (DIN ISO 4762-12.9)
$G_2 M_A$	83 Nm	maximum tightening torque
A_3	16,5 mm	position lubrication connector
G_3	M6	lubrication connector
$t G_3$	7 mm	maximum permissible screw depth for lubrication connectors
A_4	16,5 mm	position lubrication connector
G_4	M6	lubrication connector
$t G_4$	7 mm	maximum permissible screw depth for lubrication connectors
J_{L6}	35,3 mm	position lubrication connector

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------



Ürün ayrıntılarını medias'ta görüntüleyin

30.09.2024, 12:44:06 TRT

SCHAEFFLER

