

KWVE55-B-S

Recirculating ball bearing carriage

Carriages KWVE..-B-S, narrow carriage, four-row

Teknik bilgiler

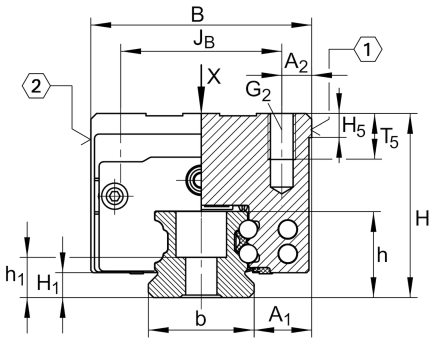

Main Dimensions & Performance Data

H	70 mm	height system
B	100 mm	width carriage
L	173,6 mm	overall length carriage
C	104.000 N	dynamic load rating
C_0	213.000 N	static load rating
M_{0x}	5.600 Nm	static moment rating about X axis
M_{0y}	2.730 Nm	static moment rating about Y axis
M_{0z}	2.730 Nm	static moment rating about Z axis
≈m	4,35 kg	Ağırlık

Veri tablosu, seçilen ürünün boyutları ve temel yük kapasitesi hakkında yalnızca genel bir bakış sunar. Lütfen bu ürüne dair ayrıntılı bilgileri ve kılavuzları inceleyin. Daha ayrıntılı bilgi için internet sitemizdeki iletişim formunu kullanabilirsiniz.

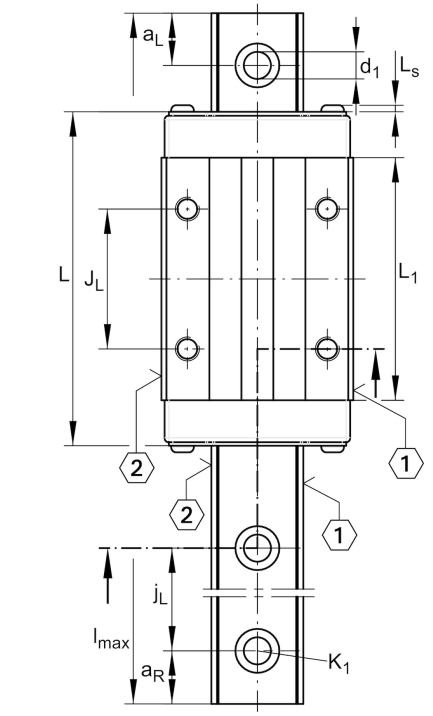

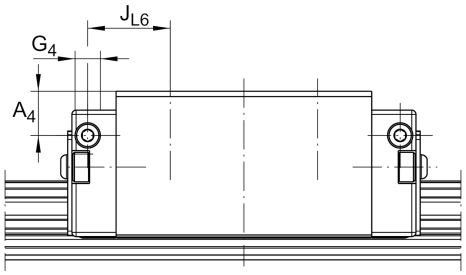

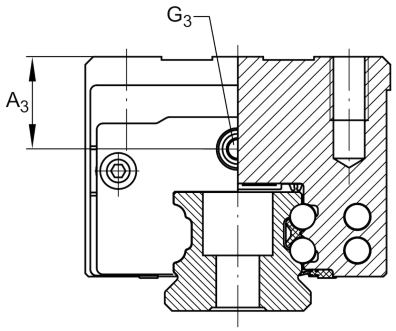

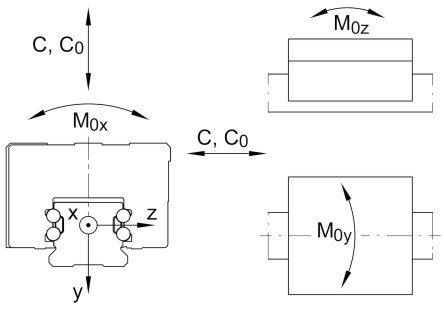

Mounting dimensions

A_1	23,5 mm	Distance from locating edge on carriage to locating edge on guideway
J_B	75 mm	
b	53 mm	width rail
A_2	12,5 mm	Distance from locating edge to hole
L_1	132 mm	
L_S	2,2 mm	
J_L	75 mm	
H_1	13,5 mm	Free space, system dimension
H_5	11,25 mm	
T_5	15 mm	Thread depth
G_2	M12	fixing screws above (DIN ISO 4762-12.9)
G2 M_A	140 Nm	maximum tightening torque
A_3	15 mm	position lubrication connector
G_3	M6	lubrication connector
t G_3	7 mm	maximum permissible screw depth for lubrication connectors
A_4	15 mm	position lubrication connector
G_4	M6	lubrication connector
t G_4	7 mm	maximum permissible screw depth for lubrication connectors
J_{L6}	40,5 mm	position lubrication connector

Additional information

VMKB_065	KWVE	Material name

Veri tablosu, seçilen ürünün boyutları ve temel yük kapasitesi hakkında yalnızca genel bir bakış sunar. Lütfen bu ürüne dair ayrıntılı bilgileri ve kılavuzları inceleyin. Daha ayrıntılı bilgi için internet sitemizdeki iletişim formunu kullanabilirsiniz.



S05

Veri tablosu, seçilen ürünün boyutları ve temel yük kapasitesi hakkında yalnızca genel bir bakış sunar. Lütfen bu ürüne dair ayrıntılı bilgileri ve kılavuzları inceleyin. Daha ayrıntılı bilgi için internet sitemizdeki iletişim formunu kullanabilirsiniz.