


KWVE55-B-SL

Recirculating ball bearing carriage


Carriages KWVE...-B-SL, narrow, long carriage, four-row

Teknik bilgiler

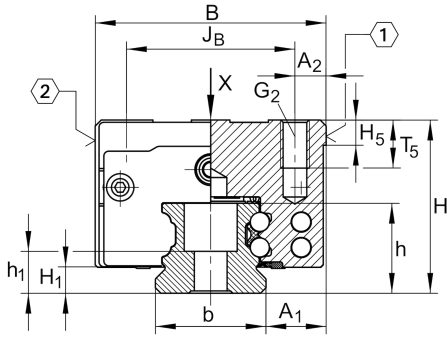

Main Dimensions & Performance Data

H	70 mm	height system
B	100 mm	width carriage
L	211,6 mm	overall length carriage
C	127.000 N	dynamic load rating
C ₀	285.000 N	static load rating
M _{0x}	7.500 Nm	static moment rating about X axis
M _{0y}	4.725 Nm	static moment rating about Y axis
M _{0z}	4.800 Nm	static moment rating about Z axis
≈m	6,3 kg	Ağırlık

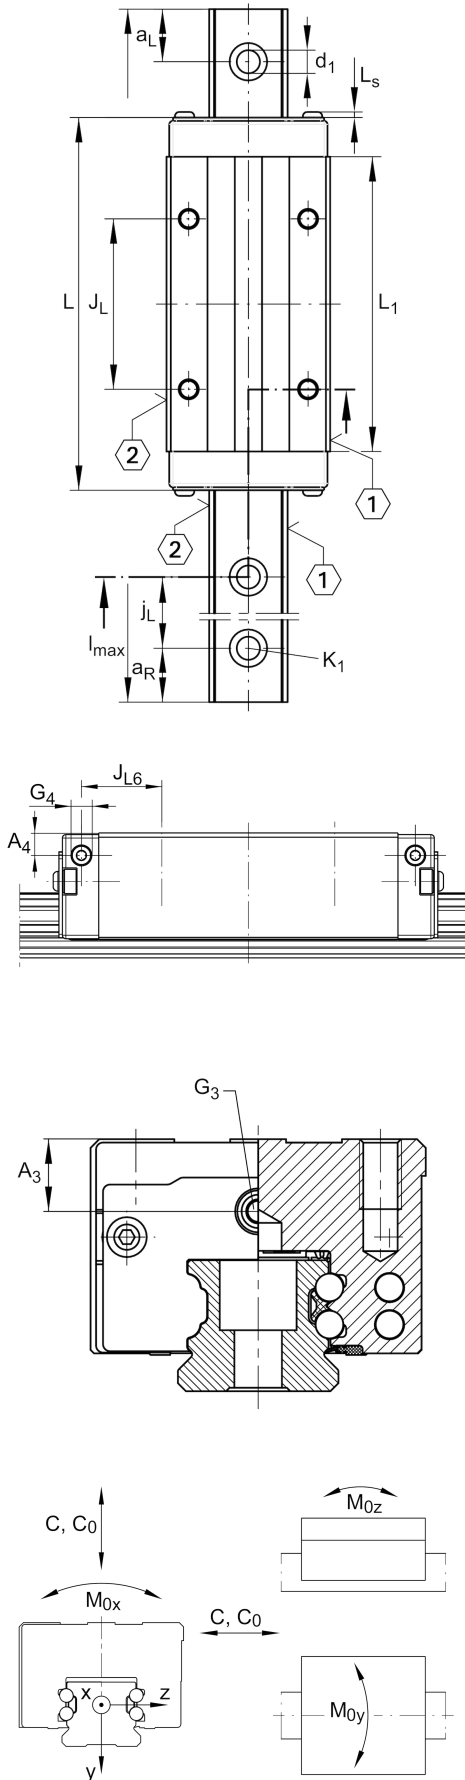

Mounting dimensions

A ₁	23,5 mm	Distance from locating edge on carriage to locating edge on guideway
J _B	75 mm	
b	53 mm	width rail
A ₂	12,5 mm	Distance from locating edge to hole
L ₁	170 mm	
L _S	2,2 mm	
J _L	95 mm	
H ₁	13,5 mm	Free space, system dimension
H ₅	11,25 mm	
T ₅	15 mm	Thread depth
G ₂	M12	fixing screws above (DIN ISO 4762-12.9)
G2 M _A	140 Nm	maximum tightening torque
A ₃	15 mm	position lubrication connector
G ₃	M6	lubrication connector
t G ₃	7 mm	maximum permissible screw depth for lubrication connectors
A ₄	15 mm	position lubrication connector
G ₄	M6	lubrication connector
t G ₄	7 mm	maximum permissible screw depth for lubrication connectors
J _{L6}	49,5 mm	position lubrication connector

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------



Ürün ayrıntılarını medias'ta görüntüleyin

30.09.2024, 12:44:17 TRT

SCHAEFFLER

