KGHK20-B-PP-AS

Linear ball bearing and housing unit

Schaeffler Kimliği:
0072714840000

Linear ball bearing and housing unit; sealed, greased, with relubrication facility; corrosion-resistant design possible

Teknik bilgiler

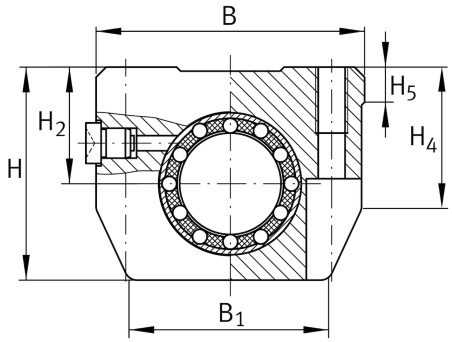

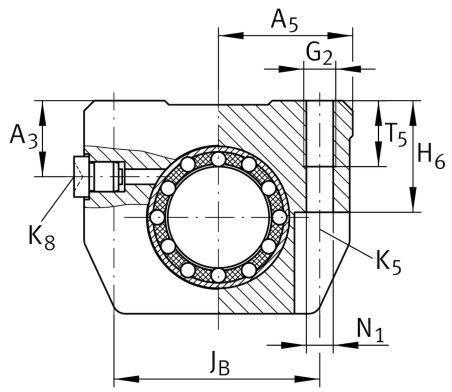

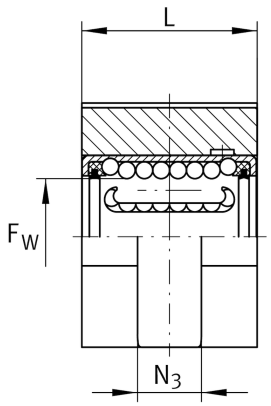

Main Dimensions & Performance Data

F_W	20 mm	Diameter of ball complement
H	42,5 mm	Height
L	30,2 mm	Length
B	53 mm	Width
C	1.110 N	dynamic load rating
C_0	790 N	Basic static load capacity
≈m	0,145 kg	Ağırlık

Mounting dimensions

J_B	40 mm	
Tol J_B	+0,15	Upper tolerance
Tol J_B	-0,15	Lower tolerance
B_1	40 mm	
A_5	26,5 mm	
H_2	23 mm	Center height
Tol H_2	+0,010	Upper tolerance
Tol H_2	-0,014	Lower tolerance
H_4	29,8 mm	Mounting Dimension
H_5	7,4 mm	
T_5	13 mm	
H_6	22 mm	Mounting Dimension
A_3	15 mm	
G_2	M6	
N_1	5,3 mm	
N_3	11 mm	
K_5	M5	
K_8	NIPA2	Lubrication nipple

Veri tablosu, seçilen ürünün boyutları ve temel yük kapasitesi hakkında yalnızca genel bir bakış sunar. Lütfen bu ürüne dair ayrıntılı bilgileri ve kılavuzları inceleyin. Daha ayrıntılı bilgi için internet sitemizdeki iletişim formunu kullanabilirsiniz.