

KGBO12-PP-AS

Linear ball bearing and housing unit

Schaeffler Kimliği:
0017188860000

Linear ball bearing and housing unit; open design, sealed, greased, with relubrication facility; corrosion-resistant design possible

Teknik bilgiler

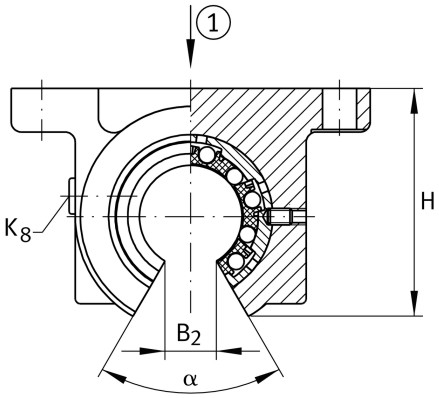

n.r.		
	12	size code
	PP	seal
	AS	relubrication facility
≈m	84,7 g	Ağırlık

Main Dimensions & Performance Data

F_W	12 mm	Diameter of ball complement
H	32 mm	Center height
L	32 mm	length
Tol L	h12	tolerance
B	52 mm	width
C	600 N	load capacity dyn.
C_0	445 N	load capacity stat. C0

Veri tablosu, seçilen ürünün boyutları ve temel yük kapasitesi hakkında yalnızca genel bir bakış sunar. Lütfen bu ürüne dair ayrıntılı bilgileri ve kılavuzları inceleyin. Daha ayrıntılı bilgi için internet sitemizdeki iletişim formunu kullanabilirsiniz.

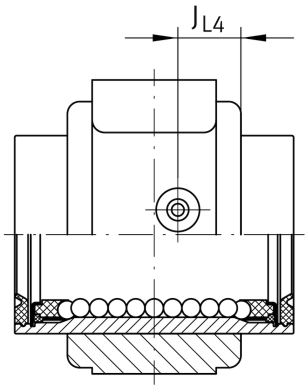

Mounting dimensions

J B	42 mm	
Tol J B	+0,15	Upper tolerance
Tol J B	-0,15	Lower tolerance
B 1	31,6 mm	
A 5	26 mm	
Tol A 5	+0,02	Upper tolerance
Tol A 5	-0,02	Lower tolerance
B 2	7,7 mm	
L 4	12 mm	Distance
L 5	20 mm	Distance
J L 4	6,5 mm	Distance
H 2	20 mm	height shaft
Tol H 2	+0,015	Upper tolerance
Tol H 2	-0,015	Lower tolerance
A 3	15 mm	
H 6	6 mm	
N !	5,5 mm	
N 3	10 mm	
K 5	M5	
K 8	NIPA1	Lubrication nipple
α	78 °	Angle
	4	Ball rows

Veri tablosu, seçilen ürünün boyutları ve temel yük kapasitesi hakkında yalnızca genel bir bakış sunar. Lütfen bu ürüne dair ayrıntılı bilgileri ve kılavuzları inceleyin. Daha ayrıntılı bilgi için internet sitemizdeki iletişim formunu kullanabilirsiniz.